

SHIFT



ELECTRIC E5 DESK DUAL TIER 25" - 44"

ISE





Completing Your Workspace

SPECIFICATIONS

- Actuator:** Two-part telescopic, with low profile build-in motor housing.
- Motor:** Four, low-voltage DC motors are provided for fast, quiet and energy efficient adjustment of the worksurface. Power rate 18V/10 amps. Duty cycle of 10%. Maximum 2 minutes of continuous operation. UL/CSA approved.
- Height Range:** From 25" to 44", providing a 19" range of adjustment, suitable for most sit-to-stand or seated applications. The two worksurfaces adjust independently.
- Speed:** 1-1/2" per second, taking 13 seconds to adjust through the full range.
- Switch:** A simple-to-use, up/down switch is standard. Three position memory switch and digital read-out switch is available.
- Load:** Each pair of electric columns supports 350 lbs. evenly distributed, including the worksurface.
- Base:** Formed 11 gauge cold rolled steel. Foot size is 3" wide x 1-1/8" high x 29" long, with levelers offering 3/4" adjustment. Column dimension is 4" deep x 2" wide. Connect channel is set at 18" above the floor, and is 3-1/2" high x 1-1/4" deep. A decorative sheet metal cover runs the full length of the connect channel. Black Sandtex powder coated finish is standard. Other colors are available.
- Worksurface:** 1" particle board core, 45 lbs. density, with 1/32" thick high pressure laminate, balanced backer, and t-mold edge are standard. Other surface types and edge finishes are available. For laminate and edge color selection please see www.ise-ergonomics.com. On larger worksurfaces a steel top frame support is provided.
- Assembly:** Easy-to-assemble instructions are available at www.ise-ergonomics.com



The Electric E5 Dual Tier base will accommodate the following worksurfaces 30" deep and up to 72" wide.*

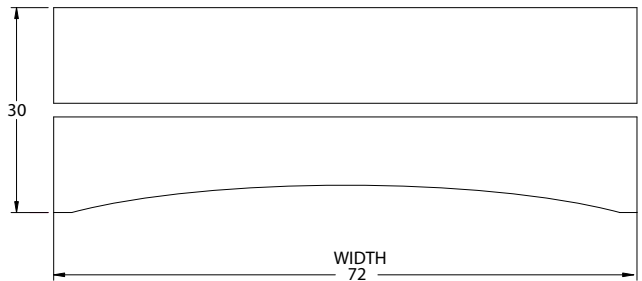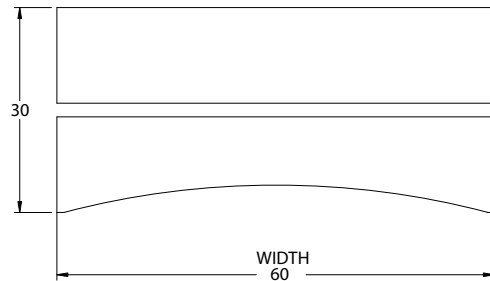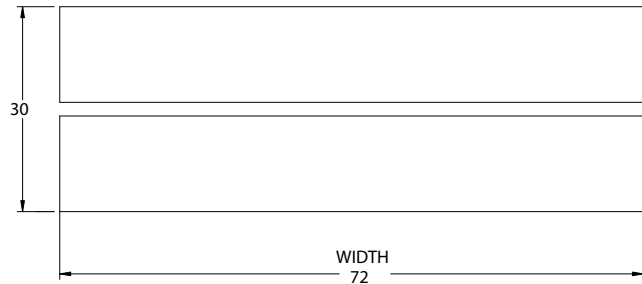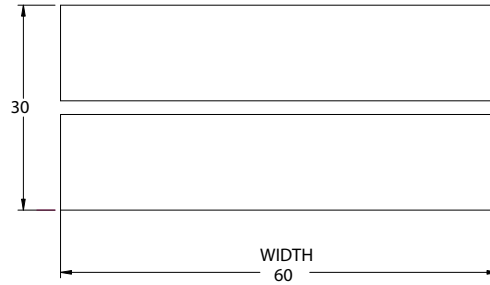

*Please see the Shift Product Pricing Guide for ordering information. All dimensions shown are nominal, before adjustment for pinch clearances.